


Description: Sound absorption solution. Manufactured using **ACUPOL**, 100% polyester thermobonded, non-toxic, non-irritating, 100% recyclable material. The covering fabric, is our polyester yarn composed of **TREVIRA CS**. Thermoformed such a way as to obtain two or a valve with variable density.



ACUPOL

Application: Sound absorption panels, recommended for applications such as ceiling or wall surface. Suitable for offices, cinemas, shopping, recording studios, room acoustics.

Finishing: Fabric TREVIRA CS in one or both sides. Weight g.300 Sqm. Available with 48 different colours.

Density: Kg 85 m³

Thickness: 30 mm

Dimension: 595x595 mm
1195x595 mm


Working temperature: Da -40°C to +80°C

Fire resistance: Euroclass - EN 13501:2002 Class B x fire - S1 for smoke, d0 for drop.


CERTIFICATION IN PROGRESS


ACOUSTING ABSORPTION TESTING

**Acoustissimo
290 mm - Cavity
NF EN ISO 11654**

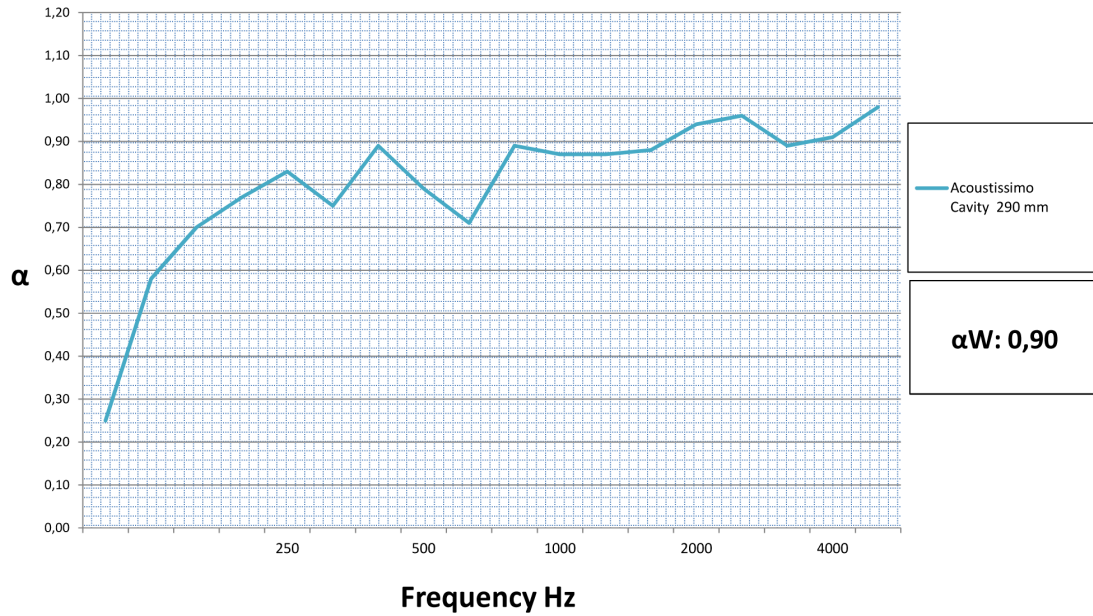


**Acoustissimo
Without Cavity
NF EN ISO 11654**

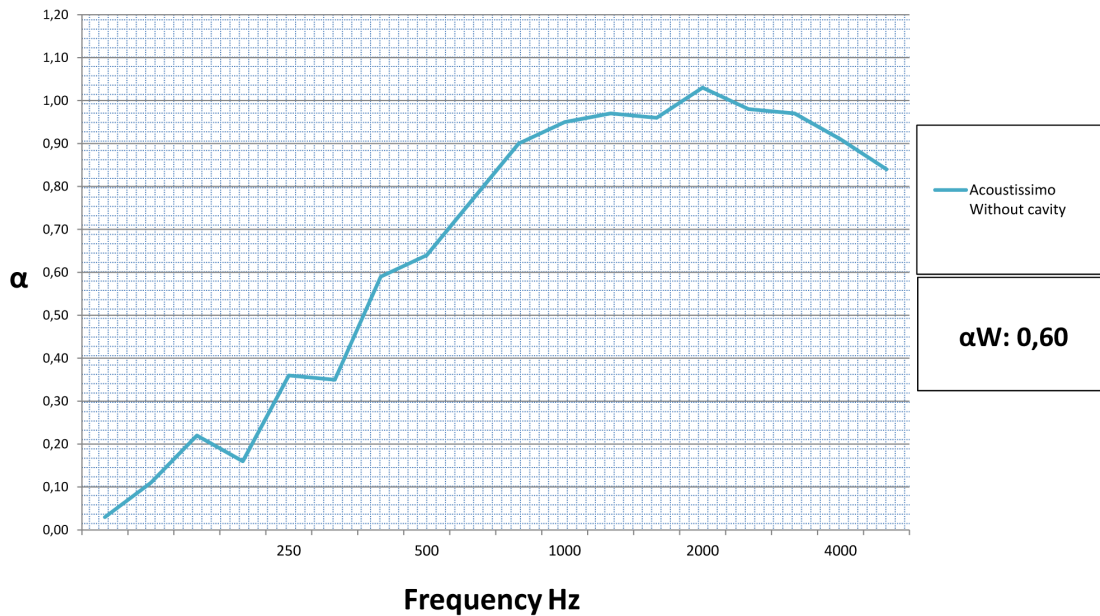





4008




9244




4027




4017




3094




9404




4019




4030




4014




4015




3008




3081




1008




9212




5003




9268




6098




5004




6071




6080




6026




6059




9606




6006



2005




8009




2036



2007



9228

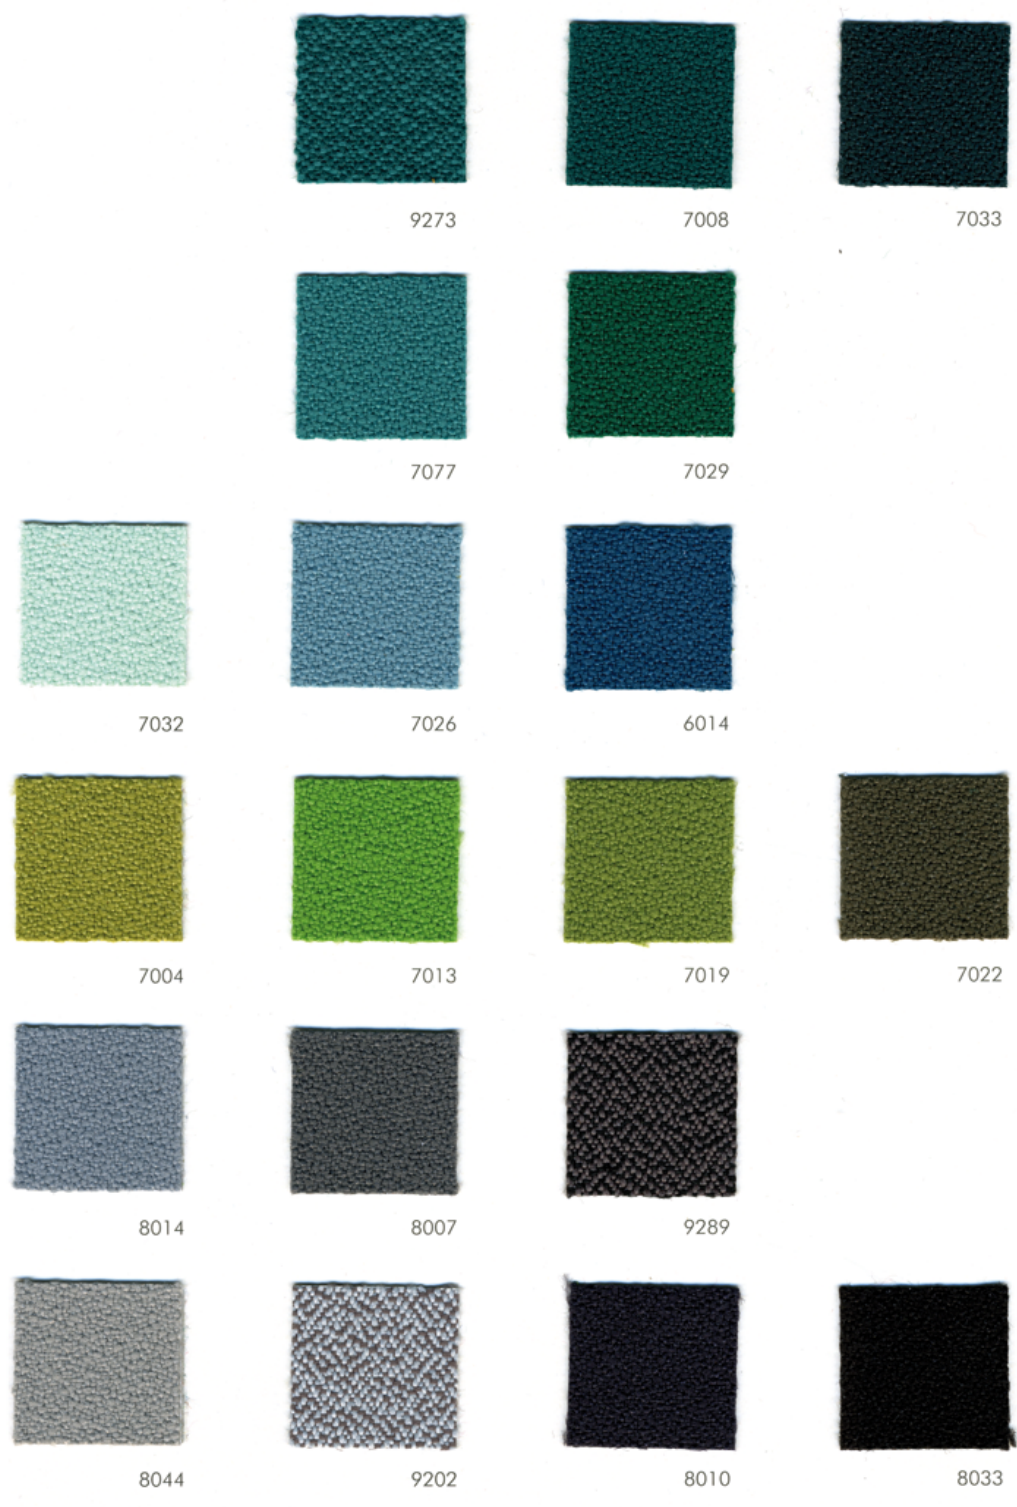

Checked by:	Issued by:	Date:	Review:
DANIELA PARODI	EDOARDO FORZESE	20.7.2014	